


NOTE:

1. For ADSS span: 200-300m;
2. Range of ADSS Dia. 8.6-9.4mm;
3. All dimensions are in millimeters;
4. Applicable standard. (ISO 1461 IS 2486/IEC:61284).

5	1	Threaded screw	SCG-386-16	Hot-dip galvanized	/
4	1	PROLATE BOARD	YCG-150	Hot-dip galvanized	/
3	1	THIMBLE	TC-4	Hot-dip galvanized	/
2	1	OUTER PREFORMED	ANY 0950 020-W	Aluminum clad steel	>95% RTS
1	1	INNER PREFORMED	ANY 0950 020-N	Aluminum clad steel	>95% RTS
ITEM	QTY	DESCRIPTION	TYPE	MATERIAL	Failure load

Tolerance		Tension Dead-end for Medium/Long span FE-DE-ADSS-0403		
≤30mm	±1.5mm	DATE: 2020-07-16	DRAWING NO.	Version
>30mm	±5%		ANY-0950-020	A
MAX.	±5mm			
DRAWING		Z.XY		
VERIFY		W.XX		
RATIFICATION		W.XX		

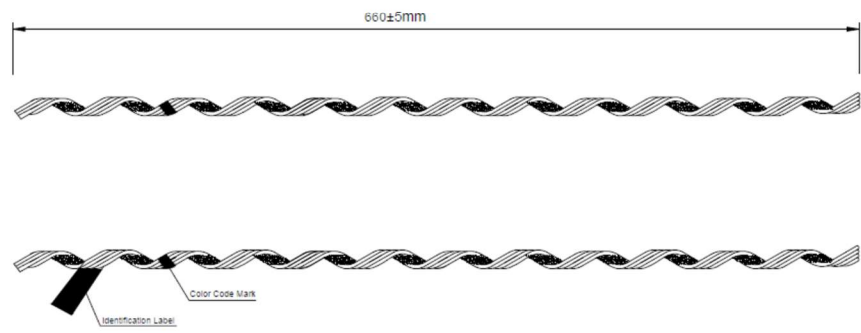

NOTE:

- 1. Material: Aluminum Alloy wire.
- 2. All dimensions are in millimeters.

Tolerance		Pre-twisted wire TYPE:1/4		
≤30mm	±1.5mm			
>30mm	±5%			
MAX.	±5mm			
DRAWING	Z.XY	DATE:2020-07-16	DRAWING NO.	Version
VERIFY	W.XX		1/4	A
RATIFICATION	W.XX			