



FIBER CABLE STEPPED STRIPPER HT-04

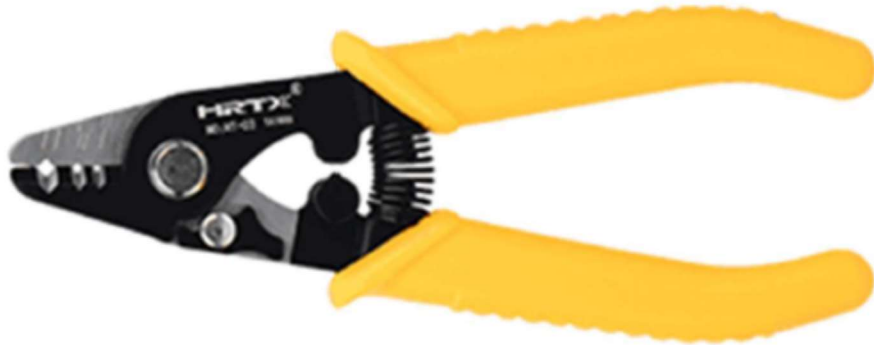

The three-hole Fiber Optic Stripper performs all common fiber stripping functions. The first hole of this Fiber Optic Stripper cuts the 1.6-3 mm fiber jacket, down to the 600-900 micron buffer coating. The second hole strips the 600-900 micron buffer coating down to the 250 micron coating. The third hole is used to strip the 250 micron fiber cable down to the 125 micron glass fiber without nicks or scratches. The handles are coated with TPR (Thermoplastic Rubber).

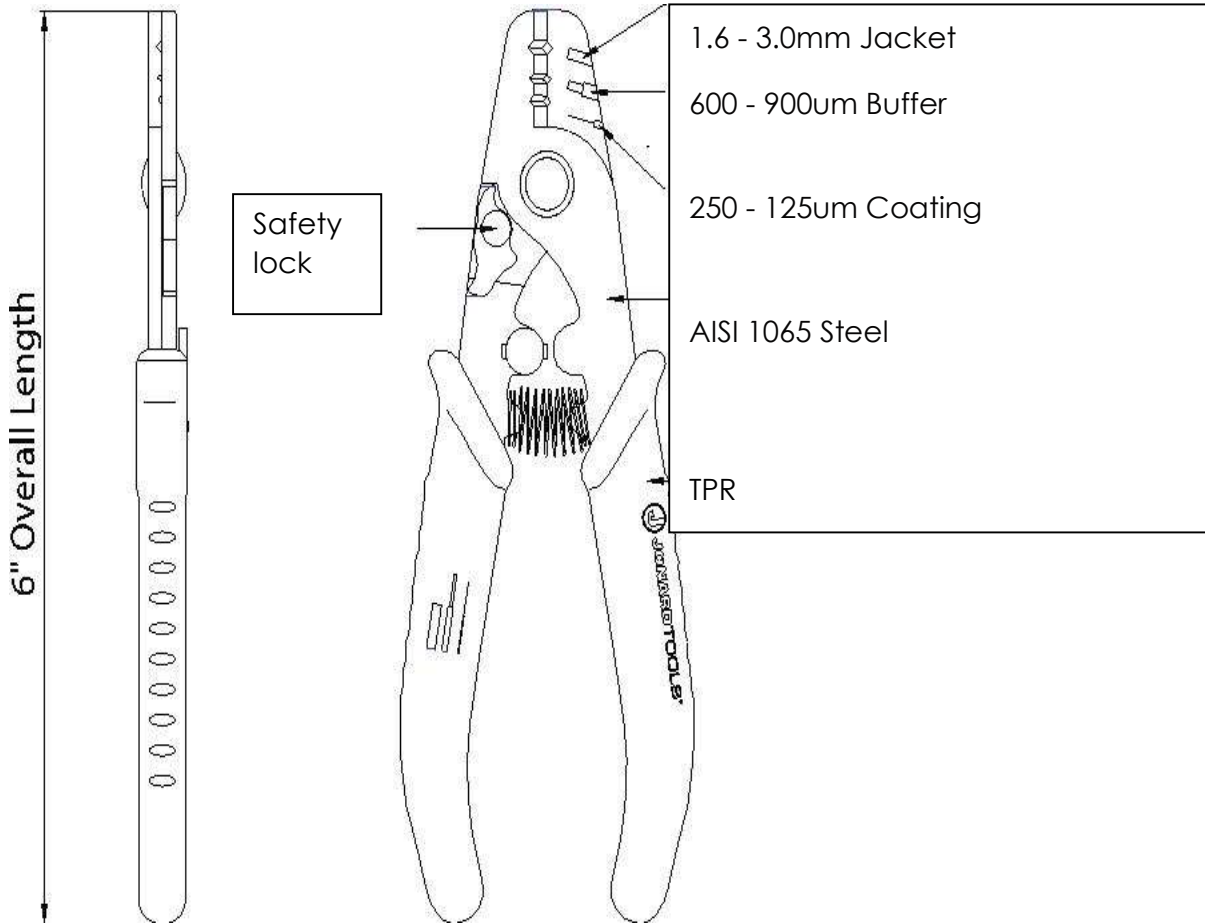

SPECIFICATIONS	
Cut Type	Strip
Cable diameter	125 micron, 250 micron, 900 micron, 1.6-3.0 mm
Handle	ThermoPlastic Rubber
Color	Yellow
Length	15.25 cm
Weight	160 grams