




FROG ENGINEERING

C Type Fiber Optic Termination Panel








C Type Fiber Optic Termination Panels are the products designed for the installation on 19" and 21" racks with the availability for mounting on the front and back with adjustable side lugs. Removable front port module and snap lock structure enables easier fiber optic termination for different capacities. Standard metal front panel can be changed with plexiglass upon request. 40x70mm ellipsis cable entries located on the left, right and the back and two PG21 gland holes provide a flexible use. These holes are covered with bendable plugs on the delivery.

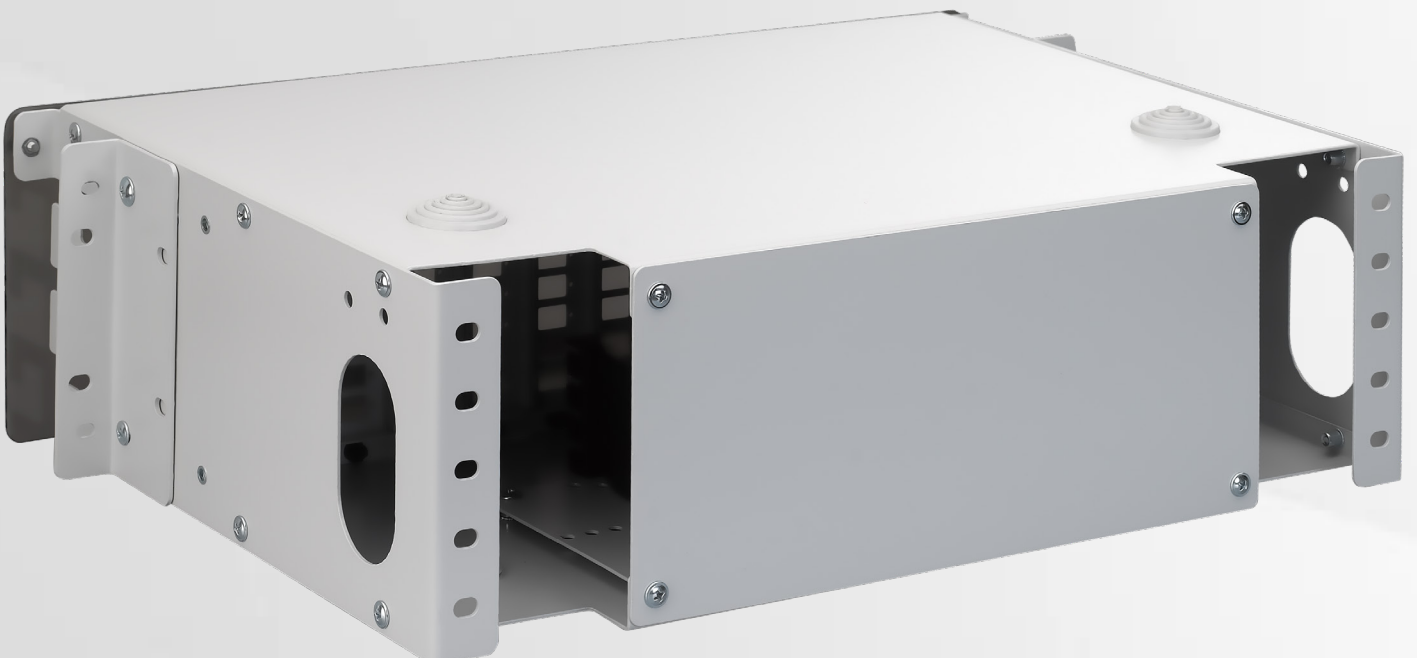



FROG ENGINEERING

C Type Fiber Optic Termination Panel

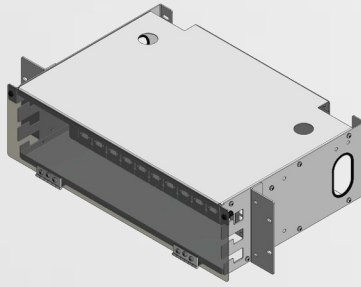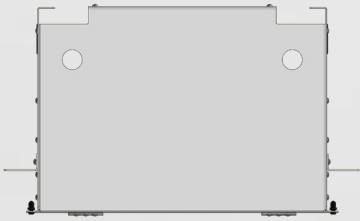

TECHNICAL FEATURES

- Modular structure designed for 19" and 21" ETSI optical distribution frames
- Outstanding cable management with maximum fiber optic termination availability
- Capacity:
 - 3U 72 / 96 ports
 - 4U 108 / 144 ports
 - 6U 162 / 216 ports
- 12 / 24 ports slim splice cassette
- Minimum cable movement
- 21" converter brackets
- Screw and spring hinge for cover
- Metal front cover (standart)
- Plexiglass front cover (optional)
- LC, FC, ST, MTRJ, E-2000 etc. modules

TECHNICAL DETAILS

3U Dimensions :

W = 482mm, D = 240 mm, H = 133 mm

4U Dimensions :

W = 482mm, D = 240 mm, H = 177.8 mm

6U Dimensions :

W = 482mm, D = 240 mm, H = 266.7 mm

Material : Carbon Steel

3U Weight : 7.2 kg

4U Weight : 7.2 kg

6U Weight : 7.2 kg

Color : RAL 7035 (Light Grey)

RAL 9005 (Black)

SET CONTENTS

- 1U 21" ETSI converter side lugs 2 pcs
- M6 screws and nut set (4 pcs) 1 set
- M4x10 cassette screw 2 pcs
- Bendable plug 4 pcs


PRODUCT	(U)	Port	Width (W)	Depth (D)	Height (H)	Weight (W)
FE.FOC3U72PORT SCD.XX	3U	72	482 mm	300 mm	133.35 mm	7.2 kg
FE.FOC3U96PORT SCS.XX	3U	96	482 mm	300 mm	133.35 mm	7.2 kg
FE.FOC3U72PORT ST.XX	3U	72	482 mm	300 mm	133.35 mm	7.2 kg
FE.FOC4U108PORT SCD.XX	4U	108	482 mm	300 mm	177.8 mm	7.2 kg
FE.FOC4U144PORT SCS.XX	4U	144	482 mm	300 mm	177.8 mm	7.2 kg
FE.FOC4U144PORT ST.XX	4U	144	482 mm	300 mm	177.8 mm	7.2 kg
FE.FOC6U162PORT SCD.XX	6U	162	482 mm	300 mm	266.7 mm	7.2 kg
FE.FOC6U216PORT SCS.XX	6U	216	482 mm	300 mm	266.7 mm	7.2 kg
FE.FOC6U216PORT ST.XX	6U	216	482 mm	300 mm	266.7 mm	7.2 kg



FROG ENGINEERING

C Type Fiber Optic Termination Panel

Port Options

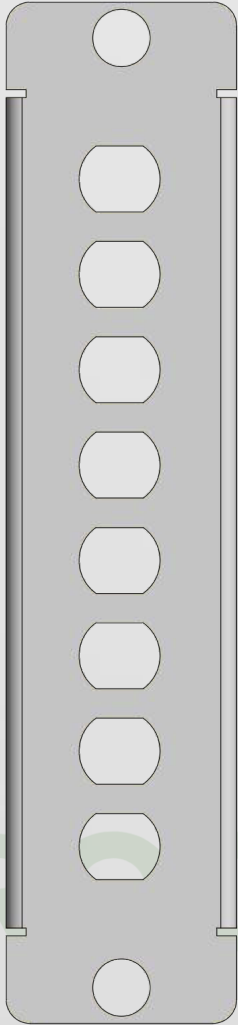

3U 8x12

96 SC Simplex or
96 LC Simplex

4U 12x12

144 ST or
144 FC

6U 18x12

216 SC ST or
216 LC FC



3U 8x9


72 SC Duplex or
72 LC Quad Vertical

4U 12x9

108 SC Duplex or
108 LC Quad Vertical

6U 18x9

162 SC Duplex or
162 LC Quad Vertical

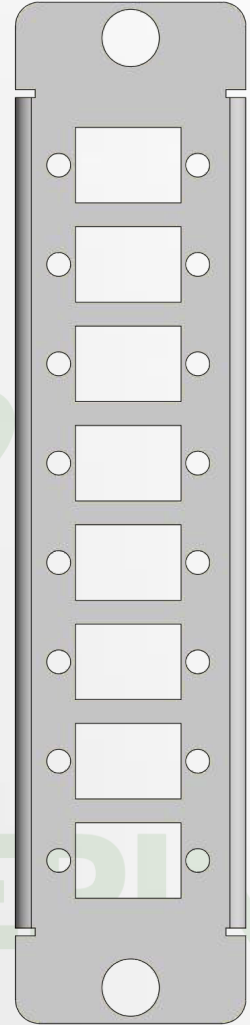

3U 8x12

96 SC Simplex or
96 LC Duplex

4U 12x12

144 SC Simplex or
144 LC Duplex

6U 18x12

216 SC Simplex or
216 LC Duplex